

# EMI FILTERS "C" AND "L" TYPE .250 OD, 10 AMP

# EYELET

Hermetic Seal Eyelet L-Section Filter

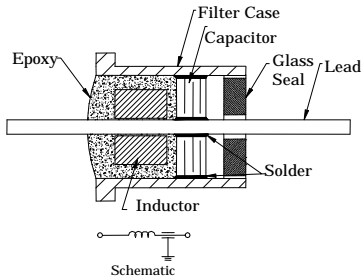


FIGURE 5

C-SECTION FILTER - Solder Mount


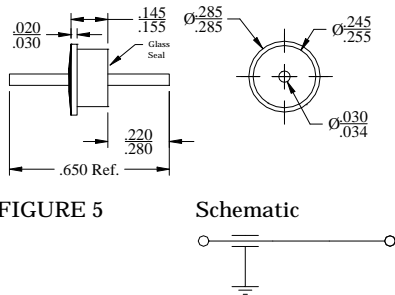


FIGURE 6

L-SECTION FILTER - Solder Mount



FILTER DIVISION PART NUMBER	FIG.	WORKING VOLTAGE (VDC)	MIN CAP $\mu$ F	MINIMUM INSERTION LOSS (dB) Per MIL-STD-220					
				500 KHz	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
1116-T415-394**	5	50	.39	21	31	43	55	70	70
1116-T415-204**	5	50	.2	18	28	40	52	70	70
1116-T415-154**	5	50	.15	17	24	38	50	70	70
1126-T415-104**	5	100	.1	14	20	38	48	70	70
1126-T415-753**	5	100	.075	12	18	37	46	70	70
1126-T415-503**	5	100	.05	8	15	35	44	70	70
1136-T415-273**	5	200	.027	4	10	30	42	65	70
1136-T415-223**	5	200	.022	2	8	26	40	58	70
1136-T415-153**	5	200	.015	-	7	25	40	55	60
1166-T415-103**	5	300	.01	-	4	20	35	52	60
1166-T415-502**	5	300	.05	-	-	15	34	50	60
1216-T715-394**	6	50	.39	21	32	46	60	70	70
1216-T715-204**	6	50	.2	18	29	42	55	70	70
1216-T715-154**	6	50	.15	17	26	40	53	70	70
1226-T715-104**	6	100	.1	14	20	39	52	70	70
1226-T715-753**	6	100	.075	12	18	37	51	70	70
1226-T715-503**	6	100	.05	9	15	36	50	70	70
1236-T715-273**	6	200	.027	4	10	30	48	65	70
1236-T715-223**	6	200	.022	2	8	27	45	65	70
1236-T715-153**	6	200	.015	-	7	25	45	60	60
1266-T715-103**	6	300	.01	-	4	20	38	55	60
1233-T715-502**	6	300	.005	-	-	15	34	50	60

NOTE: For glass seal at the flange end, change the first digit of the part number from 1 to 5.

Details subject to change without notice.

\*\* PART NUMBERS ARE INCOMPLETE. PLEASE SEE PAGE 49 TO COMPLETE THE NUMBERS.