

EMI FILTERS "C" AND "L" TYPE .128 OD, 5 AMP

EYELET

Hermetic Seal Eyelet L-Section Filter

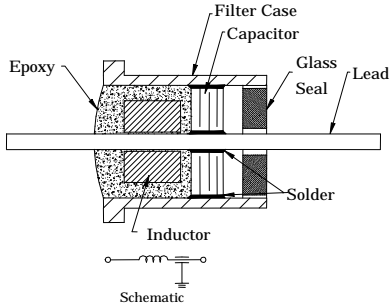


FIGURE 1
C-SECTION FILTER – SOLDER MOUNT


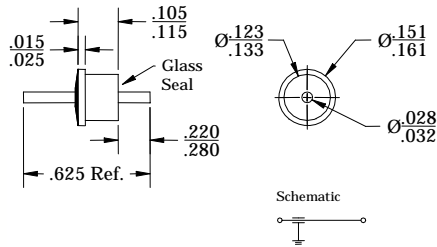


FIGURE 2
L-SECTION FILTER – Solder Mount

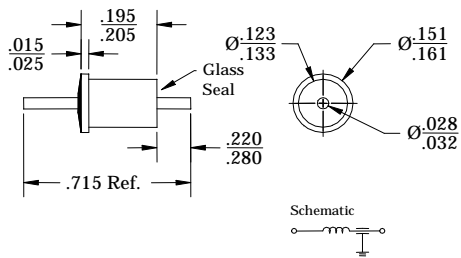

FILTER DIVISION PART NUMBER	FIG.	WORKING VOLTAGE (VDC)	MIN CAP pF	MINIMUM INSERTION LOSS (dB) Per MIL-STD-220				
				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
1115-1115-273**	1	50	27000	10	30	42	65	70
1115-1115-153**	1	50	15000	7	25	40	60	60
1115-1115-103**	1	50	10000	4	20	35	50	60
1125-1115-502**	1	100	5000	-	15	30	50	60
1125-1115-272**	1	100	2700	-	10	25	45	60
1135-1115-102**	1	200	1000	-	4	20	40	55
1135-1115-501**	1	200	500	-	-	15	34	50
1135-1115-101**	1	200	100	-	-	3	20	40
1135-1115-250**	1	200	25	-	-	-	10	25
1135-1115-100**	1	200	10	-	-	-	5	20
1135-1115-5R0**	1	200	5	-	-	-	2	15
1215-1A15-273**	2	50	27000	10	30	48	65	70
1215-1A15-153**	2	50	15000	7	25	45	60	60
1215-1A15-103**	2	50	10000	4	20	38	55	60
1225-1A15-502**	2	100	5000	-	15	30	50	60
1225-1A15-272**	2	100	2700	-	10	25	50	60
1235-1A15-102**	2	200	1000	-	4	20	45	55
1235-1A15-501**	2	200	500	-	-	15	34	55
1235-1A15-101**	2	200	100	-	-	3	20	40
1235-1A15-250**	2	200	25	-	-	-	20	25
1235-1A15-100**	2	200	10	-	-	-	15	20
1235-1A15-5R0**	2	200	5	-	-	-	5	15

NOTE: For glass seal at the flange end, change the first digit of the part number from 1 to 5.

Details subject to change without notice.

** PART NUMBERS ARE INCOMPLETE. PLEASE SEE PAGE 49 TO COMPLETE THE NUMBERS.