

Hermetic Solutions For Extreme Environments

Rectangular DC Connectors



SOURIAU PA&E's hermetically-sealed rectangular DC connectors exceed most mil-spec requirements and are designed for use in military and commercial applications, where environmental conditions require an extremely rugged and reliable hermetic seal. The uniquely-controlled CTE characteristics, chemical bonding properties and polycrystalline structure of Kryoflex allows SOURIAU PA&E to manufacture these hermetic connectors with 304L stainless steel shells and gold-plated beryllium-copper contacts to maintain excellent electrical performance and environmental characteristics.

RF/Microwave Connectors




SOURIAU PA&E's 50 Ohm hermetic RF/Microwave connectors are designed for use in military and commercial applications where environmental conditions require an extremely rugged and reliable hermetic seal. Low-loss Corning 7070 glass is used for dependable electrical performance. SOURIAU PA&E manufactures these hermetic RF connectors from a variety of compatible shell and contact materials, in both laser weld and solder-in styles, which provide excellent electrical and environmental performance characteristics.

Ceramic EMI Filters



SOURIAU PA&E's military-qualified Filter Products Group specializes in the design and manufacture of high-reliability low-pass EMI filters. Utilizing multi-layer ceramic discoidal capacitors and ferrite inductors, SOURIAU PA&E's engineering staff are experts at designing EMI filtering solutions for electronic circuits operating in hostile EMI environments. In-house manufacture and testing, in accordance with MIL-PRF-28861, Class B (QPL) and SOURIAU PA&E class H, are standard practice.

Bonded Metals

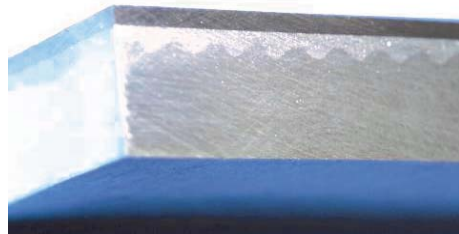

SOURIAU PA&E has been the innovative leader in the explosive metal working field for over 30 years. Our customers have access to some of the world's most exciting metal working technologies, such as: Explosive Metal Bonding, Explosive Metal Forming, Explosive Shock Hardening and Dynamic Powder Metal Compaction. These high-strain rate technologies offer unique metal working advantages that can help our customers achieve the "impossible."

SOURIAU PA&E

434 Olds Station Road Wenatchee, Washington 98801
TEL 509.664.8000 FAX 509.663.5039
www.pacaero.com



ISO 9001:2008/
AS9100


Esterline
Connection Technologies

Kryoflex is a registered trademark of SOURIAU PA&E.
pae.ds.0112.v6 © 2012 SOURIAU PA&E, All Rights Reserved

SOURIAU PA&E

Integrated Hermetic Electronic Packaging

- ✓ Turn-key solutions
- ✓ Laser-weld reliability
- ✓ Custom configurations
- ✓ Heat-sink integration

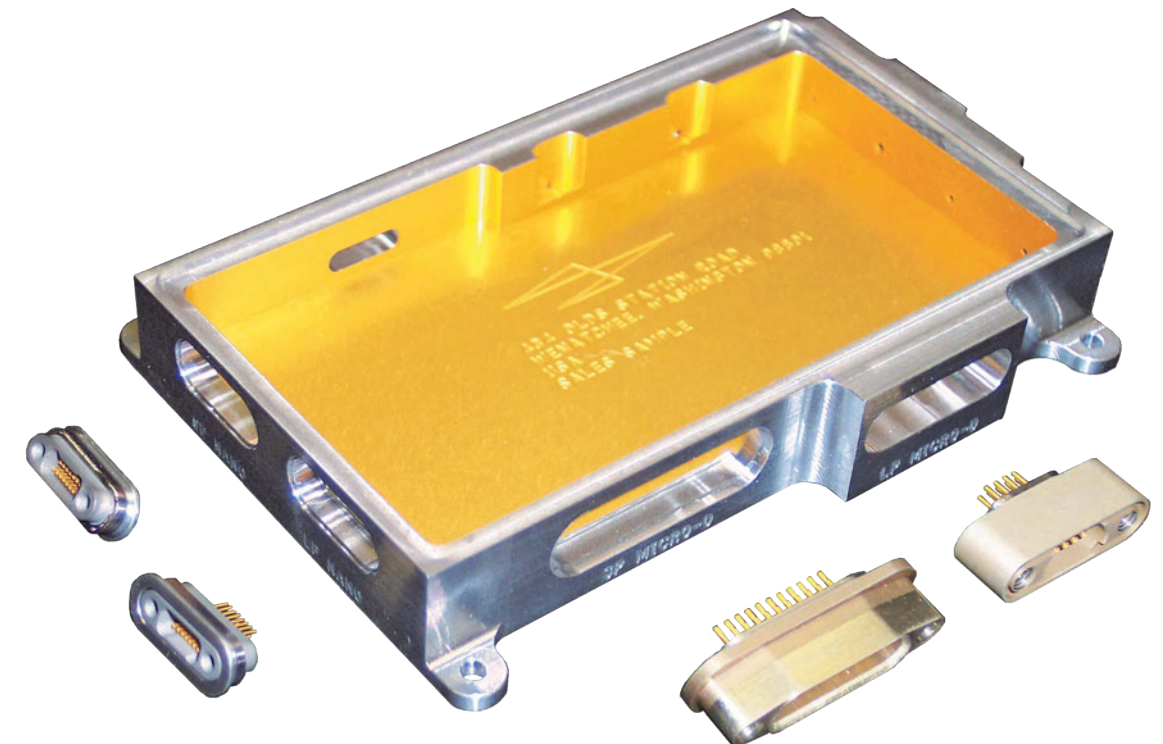

SOURIAU PA&E specializes in the design, manufacture and integration of ultra-rugged, light-weight hermetic electronic packaging for use in extreme environments. Our laser-weld construction eliminates a key point of failure: solder joint fatigue.

Esterline
Connection Technologies

RF/Microwave Flange Mount Connectors: .012" and .020" Pin

- Weldable to Aluminum, Titanium & Iron/Nickel Alloys
- Insulator: 7070 Corning Glass
- Finish: Nickel/Gold Plated
- Interface: IAW MIL-STD-348
- Performance: IAW MIL-PRF-39012
- Impedance: 50 Ohms

LWP® and LLWP® RF/Microwave Push-On Connectors

- Weldable to Aluminum, Titanium & Iron/Nickel Alloys
- Insulator: 7070 Corning Glass
- Finish: Nickel/Gold Plated
- Interface: IAW MIL-STD-348
- Performance: IAW MIL-PRF-39012
- Impedance: 50 Ohms

Rectangular DC Connectors and Feedthrus

- Weldable to Aluminum, Titanium & Iron/Nickel Alloys
- Insulator: Kryoflex® Polycrystalline Ceramic
- Pin Material: Beryllium Copper 172/173
- Pin Finish: Nickel/Gold Plated

Precision Machining & Metal Finishing

- World-Class CNC Machining Capabilities
- Close Tolerance Milling, Turning & Engraving
- Wire EDM/Precision Water Jetting
- Aluminum, Titanium and Iron/Nickel Alloys
- Plating, & Painting Facilities

SMA/SSMA RF/Microwave Thread-In Connectors

- Weldable to Aluminum, Titanium & Iron/Nickel Alloys
- Insulator: 7070 Corning Glass
- Finish: Nickel/Gold Plated
- Interface: IAW MIL-STD-348
- Performance: IAW MIL-PRF-39012
- Impedance: 50 Ohms

Low/Standard Profile Nano-D Connectors

- Weldable to Aluminum, Titanium & Iron/Nickel Alloys
- Insulator: Kryoflex® Polycrystalline Ceramic
- Pin Material: Beryllium Copper 172/173
- Pin Finish: Nickel/Gold Plated

Low/Standard Profile Micro-D Rectangular Connectors

- Compatible with Lightweight Materials Such as Aluminum, Titanium & Iron/Nickel Alloys
- Gold Plated Beryllium Copper Contacts
- Ø.018" contacts on a 0.050" pitch
- Manufactured to Exceed MIL-PRF 83513 Requirements

Explosively Bonded Metals

- Ferrous to Non-Ferrous Transitions
- Layers Bonded at the Atomic Level
- Eliminates Inter-Layer Galvanic Corrosion

Laser Welding Eliminates Solder Joint